


Adjustable 45°

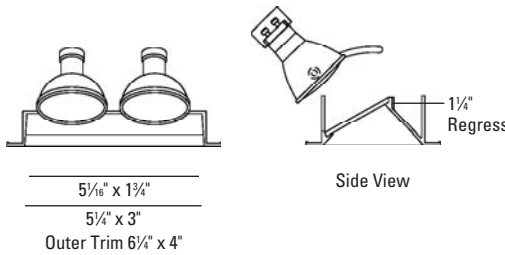

LUMINAIRE INFORMATION

APPLICATION:

Accent luminaire for Residential, Commercial, Retail or Hospitality environments.

MATERIALS:

Trim: Die cast aluminum with torsion spring mounting.
 Housing: All-Ways Square™ housing allows alignment of rectangular aperture (up to 30° rotation) after housing installation and prior to finish ceiling installation. Patent pending. Fabricated of 20 ga. galvanized steel with thru wire J-box, 4 in 4 out at min. 90°C, #12 AGW thru branch circuit wiring.
 Housing and trim supplied as one complete unit.
 Trim Lens: Frosted

LAMP: (not included)

(2) 20W or 39W MHMR16 GX10.

MOUNTING:

Butterfly brackets and adjustable nailer bars with integral nails provided. Nailer bars are extendible from 14" to 24" centers.

ADJUSTMENT:

(2) Hot aiming self locking rack and pinion 45° vertical adjustment and 15° tilt. Slide lock tab for locking horizontal rotation at 180° increments.

VOLTAGE:

Specify 120V or 277V.

BALLAST:

Solid state electronic.
 Note: Due to ballast / dimmer match some dimmers may cause ballast hum. Check with dimmer manufacturer for suitability.

CEILING CUT OUT:

3 1/2" x 5 1/16"

LISTINGS:

Dry/damp/wet under covered ceiling.




IBEW union made.


NOTES:

- Housing included with trim.
- Maximum ceiling thickness 1 inch. Consult factory for other ceiling conditions.
- Maximum 1 lens option.
- Not for use with ES16 lamps.

PHOTOMETRICS:



LTL No.: 14576.ies
(2) 39W MHMR16
 GX10 25° (tilted 45°)
 Frosted lens - 50.9% Efficiency
 Solite lens - 57% Efficiency




LTL No.: 17150.ies
(2) 20W MHMR16
 GX10 25° (tilted 45°)
 Frosted lens - 50.9% Efficiency
 Solite lens - 57% Efficiency

HOUSING INFORMATION

New Construction

BL926-A (20W)

BL460X-A (39W)

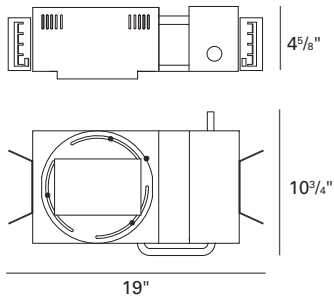

ORDERING INFORMATION

Trim	Finish	Trim Lens*	Housing	Voltage	Accessories
1648	10 - White	B - Borosilicate Clear Lens	20W MHMR16	120V	CB27 - 27" C-Channel Bars
Bevel Trim	21 - Black	C - Clear Lens	BL926-A - New Construction	277V	CB52 - 52" C-Channel Bars
Adjustable 45°, (2) 20W or 39W MHMR16	28 - Metalized Grey	F - Frosted Lens	39W MHMR16		ACCESSORY HOLDER - Consult Factory
		L - Linear Spread Lens	BL460X-A - New Construction		
		P - Prismatic Lens			
		S - Solite			
		U - Anti UV Filter			

*Frosted is standard unless option is specified

How to Specify	1648	Finish	Trim Lens	Housing	Voltage	Accessories
	Trim	Finish	Trim Lens	Housing	Voltage	Accessories