


**Wall Wash**

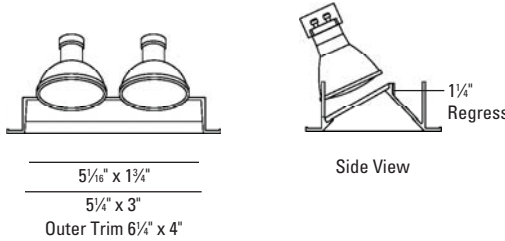

**LUMINAIRE INFORMATION**

**APPLICATION:**

Accent luminaire for Residential, Commercial, Retail or Hospitality environments.

**MATERIALS:**

Trim: Die cast aluminum with torsion spring mounting.  
Housing: All-Ways Square™ housing allows alignment of rectangular aperture (up to 30° rotation) after housing installation and prior to finish ceiling installation. Patent pending. Fabricated of 20 ga. galvanized steel with thru wire J-box, 4 in 4 out at min. 90°C, #12 AGW thru branch circuit wiring.  
Housing and trim supplied as one complete unit.  
Trim Lens: MultiTex proprietary molded low iron lens.

**LAMP:** (not included)

(2) 20W or 39W MHMR16 GX10.

**MOUNTING:**

Butterfly brackets and adjustable nailer bars with integral nails provided. Nailer bars are extendible from 14" to 24" centers.

**VOLTAGE:**

Specify 120V or 277V.

**BALLAST:**

Solid state electronic.

Note: Due to ballast / dimmer match some dimmers may cause ballast hum. Check with dimmer manufacturer for suitability.

**CEILING CUT OUT:**

3 1/2" x 5 11/16"

**LISTINGS:**

Dry/damp/wet under covered ceiling.



IBEW union made.



**MultiTex™**  
Glass lens with five different surface textures for maximum uniformity.

**NOTES:**

- Housing included with trim.
- Maximum ceiling thickness 1 inch. Consult factory for other ceiling conditions.
- Maximum 1 lens option.
- Not for use with ES16 lamps.

**PHOTOMETRICS:**

Distance From Ceiling in Feet	3' on center 3' from wall					
	0.5	1.5	2.5	3.5	4.5	5.5
0.5	8.8	8.6	8.1	8.6	8.9	
1.5	23.5	23.4	22.5	23.4	23.5	
2.5	46.0	46.1	45.5	46.2	46.0	
3.5	62.3	63.0	62.8	63.0	62.3	
4.5	66.0	67.0	66.9	66.9	65.8	
5.5	61.5	62.5	62.5	62.6	61.6	
6.5	53.4	54.3	54.3	54.3	53.5	
7.5	44.0	44.9	44.8	44.7	44.1	


Lamp: (2) 39W MHMR16 GX10, FL40, 2100 Lumens  
Reflectances: 0.8, 0.5, 0.2 LLF: 0.8  
Mounting Height: 8 FT 69.4% Efficiency

**HOUSING INFORMATION**

New Construction

**BL928-A** (20W)

**BL480-A** (39W)

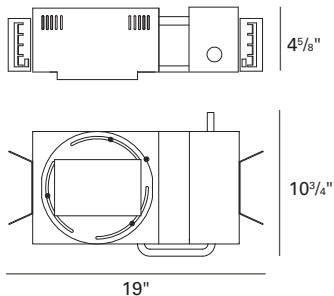

**ORDERING INFORMATION**

Trim	Finish	Housing	Voltage	Accessories
<b>1666</b>	<b>10</b> - White	<u>20W MHMR16</u>	<b>120V</b>	<b>CB27</b> - 27" C-Channel Bars
Bevel Trim	<b>21</b> - Black	<b>BL928-A</b> - New Construction	<b>277V</b>	<b>CB52</b> - 52" C-Channel Bars
Wall Wash, (2) 20W or 39W MHMR16	<b>28</b> - Metalized Grey	<u>39W MHMR16</u>		<b>ACCESSORY HOLDER</b> - Consult Factory
		<b>BL480-A</b> - New Construction		

How to Specify	1666	Finish	Housing	Voltage	Accessories
	Trim	Finish	Housing	Voltage	Accessories