
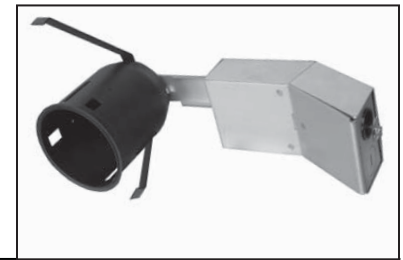


Recessed Housing Low Voltage

325RT-50

Retrofit For 3-3/4" Sliver and Stellos Trims

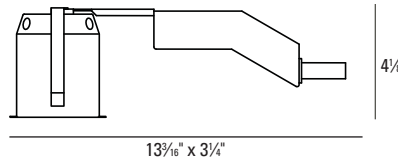

HOUSING INFORMATION

APPLICATION:

For use with USAI trims rated up to 50W. This housing permits the use of small diameter trims in non-accessible ceilings without the need for secondary rings or goof rings. This housing is serviced through the aperture with no ceiling access required.

MATERIALS:

Housing: Fabricated of black powder coated 20 ga. galvanized steel. 2 in 2 out at min. 90°C, #12 AGW thru branch circuit wiring.

LAMPS: (not included)
50W max. MR16 GU5.3.

VOLTAGE:
Specify 120V or 277V.

TRANSFORMER:

Low voltage solid state electronic.
Note: Due to transformer / dimmer match some dimmers may cause transformer hum. Check with dimmer manufacturer for suitability.

THERMAL PROTECTOR:

Provided as standard.

SOCKET:

Porcelain construction with 18 ga., 250°C SF-2 sleeved leads. Sized for MR16 halogen 12V lamps. Bi-pin base GU5.3.

MOUNTING:

Supplied with two steel lever swing arms.

LISTINGS:

Dry/damp/wet under covered ceiling.
Some trims may not be applicable with wet listing. See specific trim spec sheets for trims that apply. Not wet listed for flush (325CCR and 325CCS) installation.
Meets ASTM E283 airflow.




IBEW union made.

CEILING CUT OUT:

3 3/8" Ø

NOTES:

- Maximum ceiling thickness 1 1/8". Consult factory for other ceiling conditions.
- Use 325CCR and 325CCS trimless adapters for a smooth flush Sliver installation.




325CCR

325CCS

DIMENSIONS

New Construction

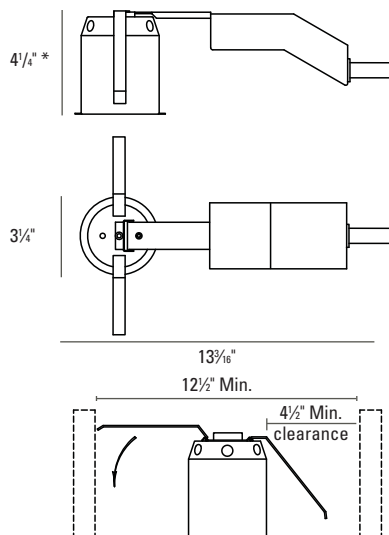

* 5 1/2" minimum clearance above ceiling required.

COMPATIBLE TRIMS

SLIVER

Downlight	Adjustable	Wall Wash
7847	7852	4998
7849	7857	4999
7860	7859	5998
7870	7865	5999
7947	7875	
7949	7957	
7970	7959	
	7975	
	9865	
	9975	

STELLOS

Downlight	Adjustable	Wall Wash
1277	2280	6998
1288	7855	6999
1477	9550	7998
1488	9750	7999
1677		
1688		
2282		
3382		
8347		
8348		
8349		
8352		
9347		
9348		
9349		
9352		

ORDERING INFORMATION

Housing	– Voltage	– Accessories
325RT-50	120V	325CCR - Trimless Adapter for 3-1/2" Round Sliver Trims
Retrofit Housing for 3 3/4"	277V	325CCS - Trimless Adapter for 3-1/2" Square Sliver Trims
Sliver and Stellos Trims 50W max.		ER - Emergency Relay
How to Specify	325RT-50	–
	Housing	– Voltage – Accessories



USA Illumination™
www.usaillumination.com
info@usaillumination.com

1126 River Road
New Windsor, NY 12553

T 845-565-8500
F 845-561-1130

©2009, USAI, LLC.
All rights reserved.
All designs protected by copyright.