


# Sliver Low Voltage Halogen

## Wall Wash

# 4898 4899

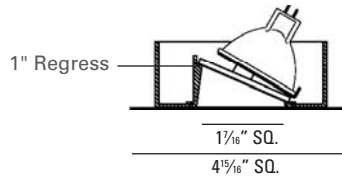

For trimless application use 75TWLS housing

### LUMINAIRE INFORMATION

#### APPLICATION:

Accent luminaire for Residential, Commercial, Retail or Hospitality environments.

#### MATERIALS:

Trim: Die cast aluminum / steel. Torsion spring mounting.

**4898** - Vertical Groove Black Baffle

**4899** - White Cone

Lens: MultiTex proprietary molded low-iron lens.

**LAMP:** (not included) When using IR lamps, 37W Max. Must use 25° lamp for optimum wall wash performance. (1) 75W Max. MR16 GU5.3.

#### TRANSFORMER:

Magnetic toroidal-HPF. Low voltage solid state electronic optionally available (consult factory). Note: Due to transformer / dimmer match some dimmers may cause transformer hum. Check with dimmer manufacturer for suitability.

#### ADJUSTMENT:

360° horizontal rotation in 90° increments.

#### VOLTAGE:

Specify 120V or 277V.

#### CEILING CUT OUT:

4<sup>3/8</sup>" Ø

#### LISTINGS:

Dry/damp location.



IC/Airtight housing meets Washington state airflow requirement and ASTM E283. Chicago Plenum housing is Chicago Plenum rated. IBEW union made.


#### NOTES:

- Maximum ceiling thickness 1 inch. Consult factory for other ceiling conditions.
- No lens options available.
- Trimless available for 75W New Construction only.\*



**MultiTex™**  
Glass lens with five different surface textures for maximum uniformity.

#### PHOTOMETRICS:

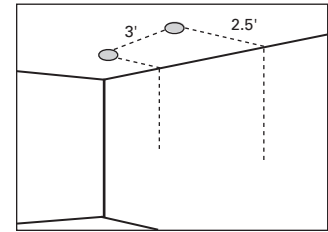

Distance From Ceiling in Feet	3' on center 2.5' from wall					
	0.5	3.9	3.8	3.5	3.8	4.0
1.5	11.9	11.8	10.6	11.8	11.9	11.9
2.5	25.2	25.3	23.3	25.3	25.3	25.3
3.5	31.9	32.1	30.7	32.0	32.0	32.0
4.5	28.1	28.3	27.9	28.3	28.3	28.0
5.5	21.7	22.0	22.0	22.1	21.7	21.7
6.5	16.7	17.0	17.0	17.0	16.8	16.8
7.5	12.9	13.1	13.1	13.2	13.0	13.0

Lamp: 75W MR16 GU5.3 40°, 1326 Lumens  
Reflectances: 0.8, 0.5, 0.2  
LLF: 0.8 Mounting Height: 8 FT  
69.1% Efficiency

### HOUSING INFORMATION

New Construction  
**50TW** - (50W)


New Construction  
**75TW** - (75W)

New Construction for Trimless  
**75TWLS** - (75W)\*

IC/Airtight  
**50ICN** - (50W)

Chicago Plenum  
**50TWCP** - (50W)

Remote Transformer  
**50RM** - (50W)

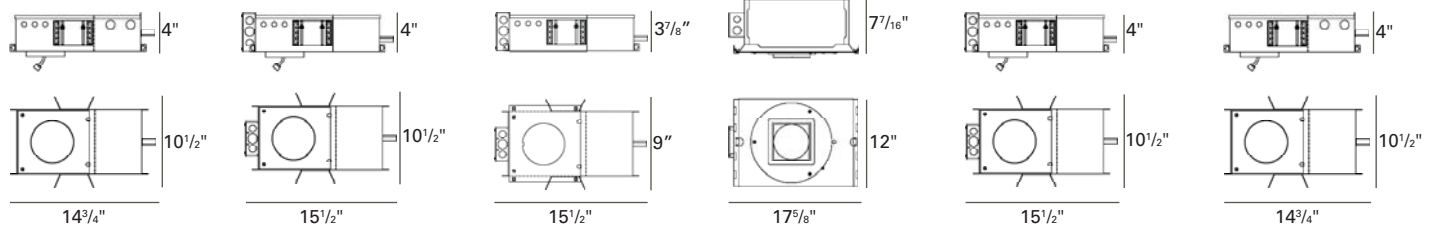

### HOW TO SPECIFY

Trim	Finish	Housing	Voltage	Accessories
<p><b>4898</b> - Vertical Groove Black Baffle <b>4899</b> - White Cone Sliver Wall Wash, 75W Max. MR16 GU5.3</p>	<p><b>10</b> - White <b>12</b> - Brushed Stainless Steel <b>21</b> - Black <b>22</b> - Textured White <b>28</b> - Metalized Grey</p>	<p><b>50TW</b> - New Construction <b>75TW</b> - New Construction <b>75TWLS</b> - New Construction for Trimless <b>50ICN</b> - IC/Airtight <b>50TWCP</b> - Chicago Plenum <b>50RM</b> - Remote Transformer</p>	<p><b>120V</b> <b>277V</b></p>	<p><b>ER</b> - Emergency Relay</p>