
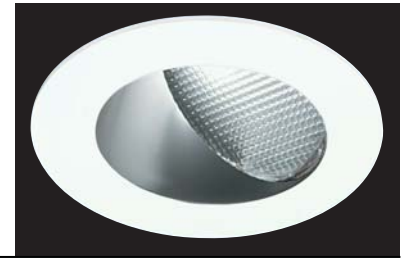


Wall Wash

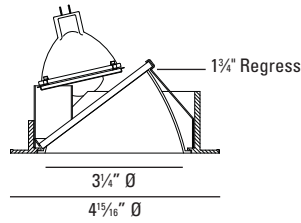

LUMINAIRE INFORMATION

APPLICATION:

Accent luminaire for Residential, Commercial, Retail or Hospitality environments.

MATERIALS:

Trim: Die cast aluminum with torsion spring mounting.
 Matte Alzak Cone
 Housing - Fabricated of 20 ga. galvanized steel with thru wire J-box, 2 in 2 out (4 in 4 out for IC/ Airtight) at min. 90°C, #12 AGW thru branch circuit wiring.
 Housing and trim supplied as one complete unit.
 Lens: Prismatic tempered glass.

LAMP: (not included) When using IR lamps, 37W Max.
 New Construction / Chicago Plenum: (1) 75W max. MR16 GU5.3
 IC/Airtight: (1) 50W max. MR16 GU5.3

VOLTAGE:

Specify 120V, 277V or 347V.
 347V is for New Construction housing only.

TRANSFORMER:

Magnetic toroidal-HPF.
 Note: Due to transformer / dimmer match some dimmers may cause transformer hum. Check with dimmer manufacturer for suitability.

CEILING CUT OUT:

4 3/8" Ø

LISTINGS:

Dry/damp location.




IC/Airtight housing meets Washington state airflow requirement and ASTM E283. Chicago Plenum housing is Chicago Plenum rated.
 IBEW union made.

NOTES:

- Housing included with trim.
- Maximum ceiling thickness 1 inch. Consult factory for other ceiling conditions.
- Maximum 1 lens options (size A).

PHOTOMETRICS:

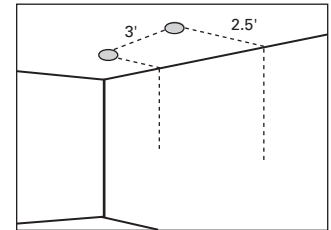


Distance From Ceiling in Feet	3' on center					
	0.5	3.9	2.9	2.9	3.9	2.9
1.5	16.2	12.0	12.0	16.2	11.9	
2.5	21.7	16.9	17.0	20.7	16.7	
3.5	19.0	17.4	17.5	19.0	17.0	
4.5	15.5	15.1	15.1	15.5	14.7	
5.5	12.5	12.4	12.4	12.5	11.9	
6.5	10.2	10.2	10.2	10.2	9.8	
7.5	8.9	9.0	8.9	8.9	8.5	

LTL No.: 09048
 Lamp: 71W MR16 GU5.3 40°
 1200 Lumens
 Reflectances: 0.8, 0.5, 0.2
 LLF: 0.8 Mounting Height: 8 FT
 56.2% Efficiency

HOUSING INFORMATION


New Construction - (75W)

HX102

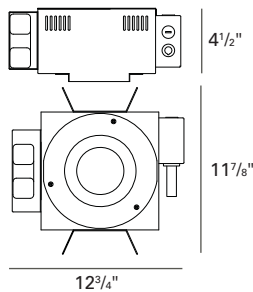


IC/Airtight - (50W)

HX102-IC

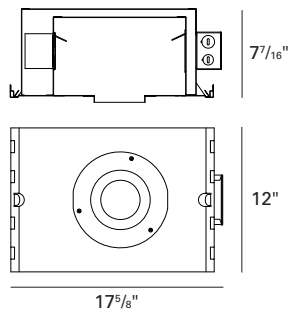

Chicago Plenum - (75W)

HX102-CP

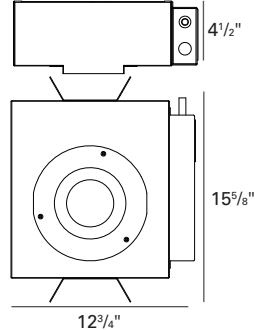

ORDERING INFORMATION

Trim	Finish	Housing	Voltage	Accessories
7800 - Matte Alzak Cone	10 - White	HX102 - New Construction	120V	9143A - Frosted Lens
HX	21 - Black	HX102-IC - IC/Airtight	277V	9153A - Anti UV Filter
Wall Wash,	28 - Metalized Grey	HX102-CP - Chicago Plenum	347V*	9155A - Linear Spread Lens
New Construction and			*347V for New	9156A - Prismatic Spread Lens
Chicago Plenum: 71W MR16 GU5.3			Construction	9157A - Stippled/Solite Soft Focus Lens
IC/Airtight: 50W MR16 GU5.3			housing only.	9199A - Frosted Borosilicate Lens
				CB27 - 27" C-Channel Bars
				CB52 - 52" C-Channel Bars
				ER - Emergency Relay

How to Specify	7800	Finish	Housing	Voltage	Accessories
	Trim	Finish	Housing	Voltage	Accessories