
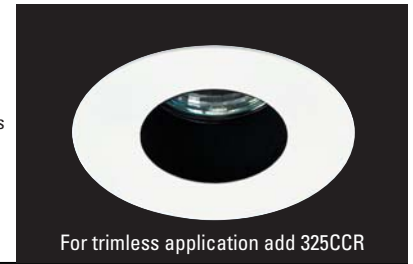


# Sliver Low Voltage Halogen

# 7870 7847 7849

## Downlight



For trimless application add 325CCR

### LUMINAIRE INFORMATION

#### APPLICATION:

Accent luminaire for Residential, Commercial, Retail or Hospitality environments.

#### MATERIALS:

Trim: Die cast aluminum / steel. Torsion spring mounting.  
 Lens: Clear.  
 7870 - Vertical groove black baffle  
 7847 - Chrome cone  
 7849 - White cone

**LAMP:** (not included) When using IR lamps, 37W Max.  
 (1) 50W max. MR16 GU5.3

#### TRANSFORMER:

Low voltage solid state electronic.  
 Note: Due to transformer / dimmer match some dimmers may cause transformer hum. Check with dimmer manufacturer for suitability.

#### VOLTAGE:

Specify 120V or 277V.

#### CEILING CUT OUT:

3 3/8" Ø

#### LISTINGS:


Dry/damp/wet under covered ceiling.  
 Not wet listed for flush (325CCR) installation.



IC/Airtight housing meets Washington state airflow requirement and ASTM E283.  
 IBEW union made.


#### NOTES:

- Maximum ceiling thickness 1 inch. Consult factory for other ceiling conditions.
- Maximum 1 lens option (size B).
- Use 325CCR trimless adapter for a smooth flush Sliver installation.



#### PHOTOMETRICS:


Distribution chart



LTL No.: 14456.ies  
 50W MR16 GU5.3 36°  
 Clear lens  
 67.8% Efficiency

| Ft    | FC    | Dia.  |
|-------|-------|-------|
| below | nadir | @ 50% |
| 6.0   | 51.4  | 3.4   |
| 8.0   | 28.9  | 4.6   |
| 10.0  | 18.5  | 5.7   |
| 12.0  | 12.9  | 6.9   |
| 14.0  | 9.4   | 8.0   |
| 16.0  | 7.2   | 9.2   |

### HOUSING INFORMATION

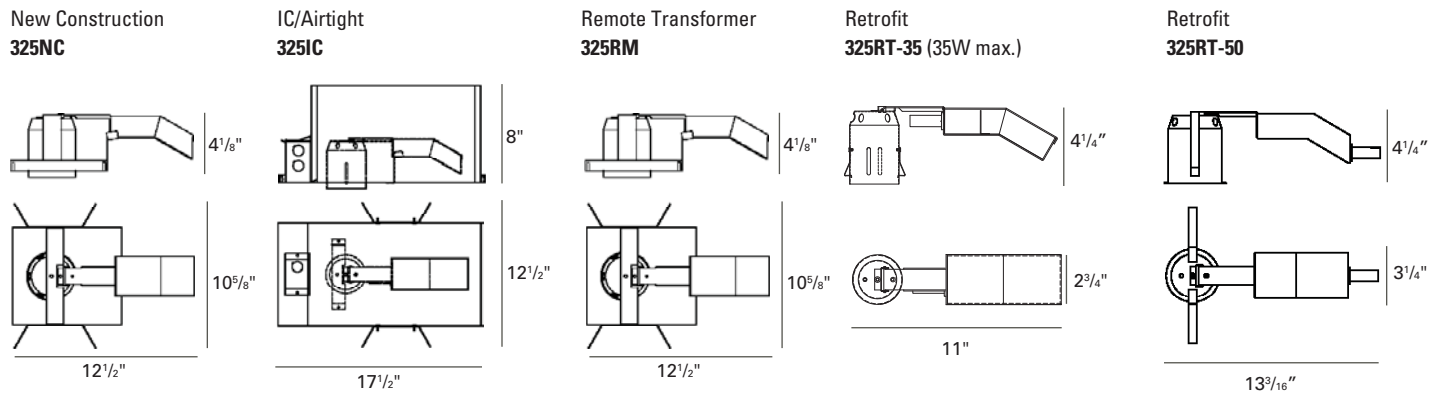

### HOW TO SPECIFY

| Trim   | Finish  | Housing   | Voltage                 | Accessories  |
|--|---|---|-------------------------|--|
| <p>7870 - Vertical Groove Black Baffle</p> <p>7847 - Chrome Cone</p> <p>7849 - White Cone</p> <p>Sliver<br/>Downlight,<br/>50W Max. MR16 GU5.3</p> | <p>10 - White</p> <p>12 - Brushed Stainless Steel</p> <p>21 - Black</p> <p>22 - Textured White</p> <p>28 - Metalized Grey</p> | <p>325NC - New Construction</p> <p>325IC - IC/Airtight</p> <p>325RM - Remote Transformer</p> <p>325RT-35 - Retrofit (35W max.)</p> <p>325RT-50 - Retrofit</p> | <p>120V</p> <p>277V</p> | <p>8177B - Hex Cell Louver</p> <p>9143B - Frosted Lens</p> <p>9153B - Anti UV Filter</p> <p>9155B - Linear Spread Lens</p> <p>9156B - Prismatic Spread Lens</p> <p>9157B - Solite Lens</p> <p>9199B - Frosted Borosilicate Lens</p> <p>ER - Emergency Relay</p> <p>325CCR - Trimless Adapter</p> |