


Sliver Low Voltage Halogen

7970 7947 7949

Downlight

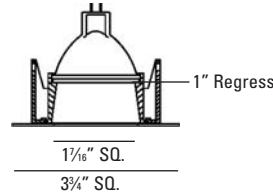

LUMINAIRE INFORMATION

APPLICATION:

Accent luminaire for Residential, Commercial, Retail or Hospitality environments.

MATERIALS:

Trim: Die cast aluminum / steel. Torsion spring mounting.
 Lens: Clear.
 7970 - Vertical groove black baffle
 7947 - Chrome cone
 7949 - White cone

LAMP: (not included) When using IR lamps, 37W Max.
 (1) 50W max. MR16 GU5.3

TRANSFORMER:

Low voltage solid state electronic.
 Note: Due to transformer / dimmer match some dimmers may cause transformer hum. Check with dimmer manufacturer for suitability.

VOLTAGE:

Specify 120V or 277V.

CEILING CUT OUT:

3 3/8" Ø

LISTINGS:


Dry/damp/wet under covered ceiling.
 Not wet listed for flush (325CCS) installation.



IC/Airtight housing meets Washington state airflow requirement and ASTM E283.
 IBEW union made.


NOTES:

- Maximum ceiling thickness 1 inch. Consult factory for other ceiling conditions.
- Maximum 2 lens options (size B).
- Use 325CCS trimless adapter for a smooth flush Sliver installation.



PHOTOMETRICS:


Distribution chart



LTL No.: 14456.ies
 50W MR16 GU5.3 36°
 Clear lens
 67.8% Efficiency

Ft	FC	Dia.
below	nadir	@ 50%
6.0	51.4	3.4
8.0	28.9	4.6
10.0	18.5	5.7
12.0	12.9	6.9
14.0	9.4	8.0
16.0	7.2	9.2

HOUSING INFORMATION

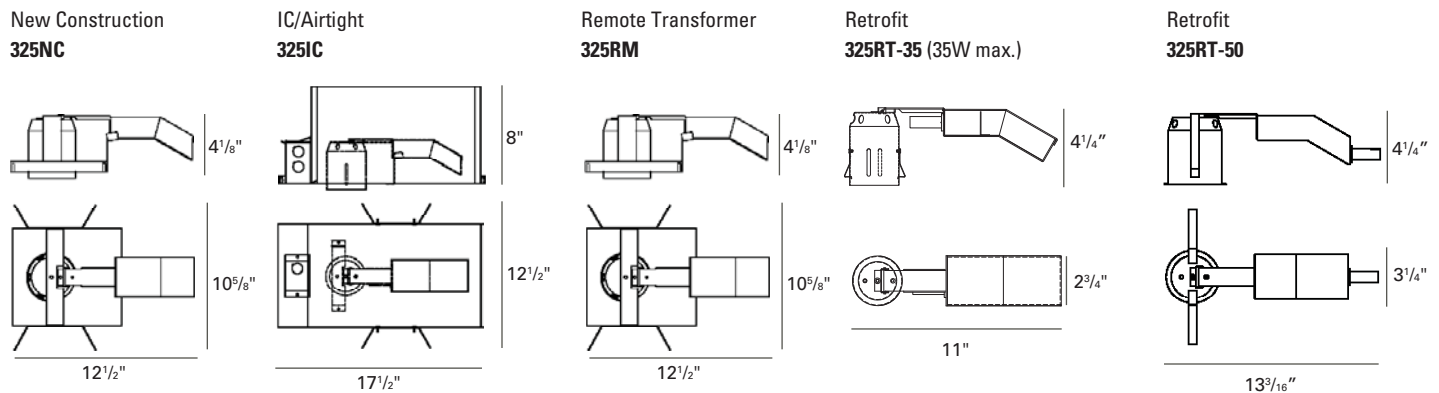

HOW TO SPECIFY

Trim	Finish	Housing	Voltage	Accessories
<p>7970 - Vertical Groove Black Baffle</p> <p>7947 - Chrome Cone</p> <p>7949 - White Cone</p> <p>Sliver Downlight, 50W Max. MR16 GU5.3</p>	<p>10 - White</p> <p>12 - Brushed Stainless Steel</p> <p>21 - Black</p> <p>22 - Textured White</p> <p>28 - Metalized Grey</p>	<p>325NC - New Construction</p> <p>325IC - IC/Airtight</p> <p>325RM - Remote Transformer</p> <p>325RT-35 - Retrofit (35W max.)</p> <p>325RT-50 - Retrofit</p>	<p>120V</p> <p>277V</p>	<p>8177B - Hex Cell Louver</p> <p>9143B - Frosted Lens</p> <p>9153B - Anti UV Filter</p> <p>9155B - Linear Spread Lens</p> <p>9156B - Prismatic Spread Lens</p> <p>9157B - Solite Lens</p> <p>9199B - Frosted Borosilicate Lens</p> <p>ER - Emergency Relay</p> <p>325CCS - Trimless Adapter</p>