


Stellos Low Voltage Halogen

8347 8348 8349 9352

Downlight



LUMINAIRE INFORMATION

APPLICATION:

Accent luminaire for Residential, Commercial, Retail or Hospitality environments.

MATERIALS:

Trim: Die cast aluminum. Torsion spring mounting.

8347 - Chrome Cone

8348 - Black Cone

8349 - White Cone

8352 - Vertical Groove Black Baffle

Lens: Clear

LAMP: (not included) When using IR lamps, 37W Max.

(1) 50W Max. MR16 GU5.3.

VOLTAGE:

Specify 120V or 277V.

TRANSFORMER:

Low voltage solid state electronic.

Note: Due to transformer / dimmer match some dimmers may cause transformer hum. Check with dimmer manufacturer for suitability.

CEILING CUT OUT:

3³/₈" Ø

LISTINGS:

Dry/damp/wet under cover ceiling location.



IC/Airtight housing meets Washington state airflow requirement and ASTM E283.


IBEW union made.

NOTES:

- Maximum ceiling thickness 1 inch. Consult factory for other ceiling conditions.
- Maximum 2 lens options (size B).

PHOTOMETRICS:


Distribution chart



LTL No.: 14456.ies
50W MR16 GU5.3 36°
Clear lens
67.8% Efficiency

Ft below	FC nadir	Dia. @ 50%
6.0	51.4	3.4
8.0	28.9	4.6
10.0	18.5	5.7
12.0	12.9	6.9
14.0	9.4	8.0
16.0	7.2	9.2

HOUSING INFORMATION

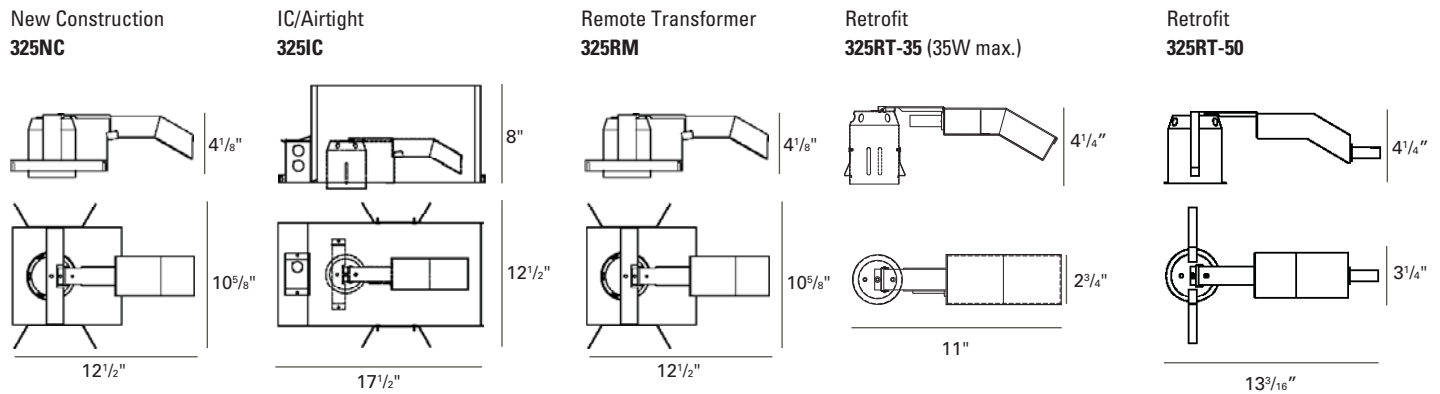

HOW TO SPECIFY

Trim	Finish	Housing	Voltage	Accessories
<p>8347 - Chrome Cone</p> <p>8348 - Black Cone</p> <p>8349 - White Cone</p> <p>8352 - Vertical Groove Black Baffle</p> <p>Stellos Downlight, 50W Max. MR16 GU5.3</p>	<p>10 - White</p> <p>21 - Black</p> <p>28 - Metalized Grey</p>	<p>325NC - New Construction</p> <p>325IC - IC/Airtight</p> <p>325RM - Remote Transformer</p> <p>325RT-35 - Retrofit (35W max.)</p> <p>325RT-50 - Retrofit</p>	<p>120V</p> <p>277V</p>	<p>8177B - Hex Cell Louver</p> <p>9143B - Frosted Lens</p> <p>9153B - Anti UV Filter</p> <p>9155B - Linear Spread Lens</p> <p>9156B - Prismatic Spread Lens</p> <p>9157B - Solite Lens</p> <p>9199B - Frosted Borosilicate Lens</p> <p>ER - Emergency Relay</p>