


Wall Wash

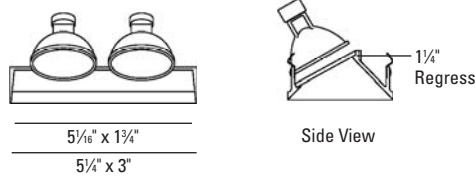

LUMINAIRE INFORMATION

APPLICATION:

Accent luminaire for Residential, Commercial, Retail or Hospitality environments.

MATERIALS:

Trim: Die cast aluminum with torsion spring mounting.
 Housing: All-Ways Square™ housing allows alignment of rectangular aperture (up to 30° rotation) after housing installation and prior to finish ceiling installation. Patent pending. Fabricated of 20 ga. galvanized steel with thru wire J-box, 4 in 4 out at min. 90°C, #12 AGW thru branch circuit wiring.
 Housing and trim supplied as one complete unit.

Trim Lens: MultiTex proprietary molded low iron lens.

LAMP: (not included) When using IR lamps, 37W Max. (2) 50W max. MR16 GU5.3

MOUNTING:

Butterfly brackets and adjustable nailer bars with integral nails provided. Nailer bars are extendible from 14" to 24" centers.

VOLTAGE:

Specify 120V or 277V.

TRANSFORMER:

Low voltage magnetic toroidal HPF. Low voltage solid state electronic optionally available (consult factory).

Note: Due to transformer / dimmer match some dimmers may cause transformer hum. Check with dimmer manufacturer for suitability.

CEILING CUT OUT:

New Construction	5 11/16" x 3 1/2"
Mill Work	5 3/8" x 3 5/16"

LISTINGS:

Dry/damp location.



IBEW union made.


NOTES:

- Housing included with trim.
- Maximum ceiling thickness 1 inch. Consult factory for other ceiling conditions.
- For drywall installation only.
- Not for use with acoustical ceilings.
- Maximum Millwork thickness 1 inch. Consult factory for other ceiling conditions.
- Maximum 1 lens option.

PHOTOMETRICS:

Distance From Ceiling in Feet	3' on center 2.5' from wall					
	0.5	4.6	4.5	4.1	4.5	4.7
1.5	14.1	14.0	12.9	14.0	14.1	14.1
2.5	25.2	25.3	24.1	25.3	25.3	25.3
3.5	30.2	30.3	29.4	30.3	30.1	30.1
4.5	28.4	28.7	28.2	28.6	28.3	28.3
5.5	23.6	23.8	23.8	23.9	23.5	23.5
6.5	18.8	19.1	19.1	19.1	18.9	18.9
7.5	14.9	15.0	15.0	15.1	14.9	14.9


Lamp: (2) 50W MR16 GU5.3, FL40, 800 Lumens
 Reflectances: 0.8, 0.5, 0.2 LLF: 0.8
 Mounting Height: 8 FT 69.9% Efficiency



HOUSING INFORMATION


New Construction - (50W)

FL410-A



Millwork - (50W)

FL410-A-ML



ORDERING INFORMATION

Trim	Finish	Housing	Voltage	Accessories
9188				
9188 Bevel Trimless Wall Wash, (2) 50W Max. MR16 GU5.3	10 - White 21 - Black 28 - Metalized Grey RAL - Special Color	FL410-A - New Construction FL410-A-ML-XX - Millwork XX=Specify Color (10, 21, 28, RAL)	120V 277V	CB27 - 27" C-Channel Bars CB52 - 52" C-Channel Bars ER - Emergency Relay ACCESSORY HOLDER - Consult Factory