


## Wall Wash

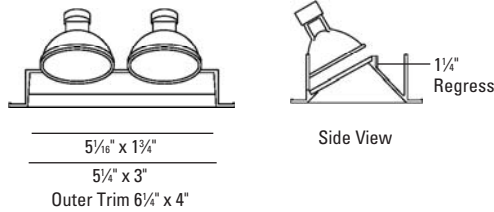

### LUMINAIRE INFORMATION

#### APPLICATION:

Accent luminaire for Residential, Commercial, Retail or Hospitality environments.

#### MATERIALS:

Trim: Die cast aluminum with torsion spring mounting.  
 Housing: All-Ways Square™ housing allows alignment of rectangular aperture (up to 30° rotation) after housing installation and prior to finish ceiling installation. Patent pending. Fabricated of 20 ga. galvanized steel with thru wire J-box, 4 in 4 out at min. 90°C, #12 AGW thru branch circuit wiring.  
 Housing and trim supplied as one complete unit.  
 Trim Lens: MultiTex proprietary molded low iron lens.

**LAMP:** (not included) When using IR lamps, 37W Max.  
 (2) 50W max. MR16 GU5.3

#### MOUNTING:

Butterfly brackets and adjustable nailer bars with integral nails provided. Nailer bars are extendible from 14" to 24" centers.

#### VOLTAGE:

Specify 120V or 277V.

#### TRANSFORMER:

Low voltage magnetic toroidal HPF. Low voltage solid state electronic optionally available (consult factory).

Note: Due to transformer / dimmer match some dimmers may cause transformer hum. Check with dimmer manufacturer for suitability.

#### CEILING CUT OUT:

3 1/2" x 5 1/16"

#### LISTINGS:

Dry/damp/wet under covered ceiling.



IBEW union made.

#### NOTES:

- Housing included with trim.
- Maximum ceiling thickness 1 inch. Consult factory for other ceiling conditions.
- Maximum 1 lens option.

#### PHOTOMETRICS:

Distance From Ceiling in Feet	3' on center 2.5' from wall					
	0.5	4.6	4.5	4.1	4.5	4.7
1.5	14.1	14.0	12.9	14.0	14.1	
2.5	25.2	25.3	24.1	25.3	25.3	
3.5	30.2	30.3	29.4	30.3	30.1	
4.5	28.4	28.7	28.2	28.6	28.3	
5.5	23.6	23.8	23.8	23.9	23.5	
6.5	18.8	19.1	19.1	19.1	18.9	
7.5	14.9	15.0	15.0	15.1	14.9	

Lamp: (2) 50W MR16 GU5.3, FL40, 800 Lumens  
 Reflectances: 0.8, 0.5, 0.2 LLF: 0.8  
 Mounting Height: 8 FT 69.9% Efficiency




#### MultiTex™

Glass lens with five different surface textures for maximum uniformity.

### HOUSING INFORMATION

New Construction - (50W)

#### BL410-A

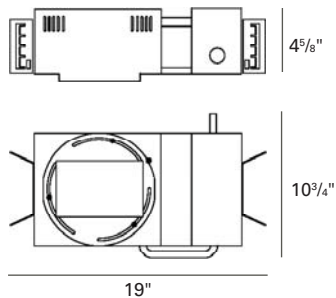

### HOW TO SPECIFY

Trim	Finish	Housing	Voltage	Accessories
9308				
9308 Bevel Trim Wall Wash, (2) 50W Max. MR16 GU5.3	10 - White 21 - Black 28 - Metalized Grey	BL410-A - New Construction	120V 277V	CB27 - 27" C-Channel Bars CB52 - 52" C-Channel Bars ER - Emergency Relay ACCESSORY HOLDER - Consult Factory