


# BEVEL® Low Voltage Halogen

# 9366

## Adjustable 35°

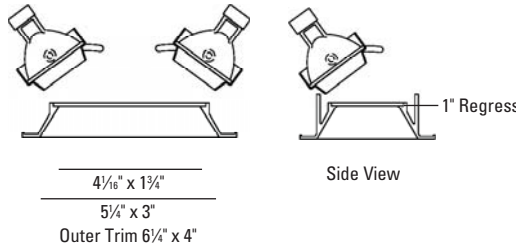

### LUMINAIRE INFORMATION

#### APPLICATION:

Accent luminaire for Residential, Commercial, Retail or Hospitality environments.

#### MATERIALS:

Trim: Die cast aluminum with torsion spring mounting.  
 Housing: All-Ways Square™ housing allows alignment of rectangular aperture (up to 30° rotation) after housing installation and prior to finish ceiling installation. Patent pending. Fabricated of 20 ga. galvanized steel with thru wire J-box, 4 in 4 out at min. 90°C, #12 AGW thru branch circuit wiring.  
 Housing and trim supplied as one complete unit.  
 Trim Lens: Frosted

**LAMP:** (not included) When using IR lamps, 37W Max.  
 (2) 50W max. MR16 GU5.3

#### ADJUSTMENT:

(2) 180° lockable horizontal rotation and 35° lockable vertical tilt.

#### MOUNTING:

Butterfly brackets and adjustable nailer bars with integral nails provided. Nailer bars are extendible from 14" to 24" centers.

#### VOLTAGE:

Specify 120V or 277V.

#### TRANSFORMER:

Low voltage magnetic toroidal HPF. Low voltage solid state electronic optionally available (consult factory).

Note: Due to transformer / dimmer match some dimmers may cause transformer hum. Check with dimmer manufacturer for suitability.

#### CEILING CUT OUT:

3 1/2" x 5 1/16"

#### LISTINGS:

Dry/damp/wet under covered ceiling.




IBEW union made.

#### NOTES:

- Housing included with trim.
- Maximum ceiling thickness 1 inch. Consult factory for other ceiling conditions.
- Maximum 1 lens option.

#### PHOTOMETRICS:

##### Distribution chart




LTL No.: 13908.ies  
 (2) 50W MR16  
 GU5.3 35° (tilted 35°)  
 Frosted lens -  
 51.2% Efficiency  
 Solite lens -  
 58.1% Efficiency

### HOUSING INFORMATION

New Construction - (50W)

#### BL405-A

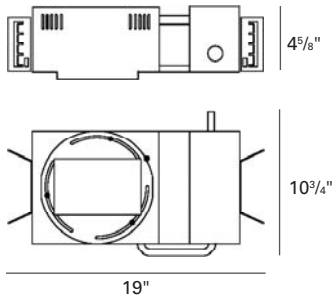

### HOW TO SPECIFY

Trim	Finish	Trim Lens*	Housing	Voltage	Accessories
9366		*Frosted is standard unless option is specified			
<b>9366</b> Bevel Trim Adjustable 35°, (2) 50W Max. MR16 GU5.3	<b>10</b> - White <b>21</b> - Black <b>28</b> - Metalized Grey	<b>B</b> - Borosilicate Clear Lens <b>C</b> - Clear Lens <b>F</b> - Frosted Lens <b>L</b> - Linear Spread Lens <b>P</b> - Prismatic Lens <b>S</b> - Solite <b>U</b> - Anti UV Filter	<b>BL405-A</b> - New Construction	<b>120V</b> <b>277V</b>	<b>CB27</b> - 27" C-Channel Bars <b>CB52</b> - 52" C-Channel Bars <b>ER</b> - Emergency Relay <b>ACCESSORY HOLDER</b> - Consult Factory