


BEVEL[®] Metal Halide

9845

Adjustable 45°

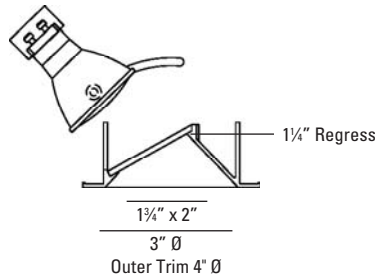

LUMINAIRE INFORMATION

APPLICATION:

Accent luminaire for Residential, Commercial, Retail or Hospitality environments.

Trim: Die cast aluminum with torsion spring mounting.
 Housing: Fabricated of 20 ga. galvanized steel with thru wire J-box, 2 in 2 out (4 in 4 out for IC/ Airtight) at min. 90°C, #12 AGW thru branch circuit wiring.
 Housing and trim supplied as one complete unit.
 Trim Lens: Solite

LAMP: (not included)

(1) 20W or 39W MMHR16 GX10.

MOUNTING:

Butterfly brackets and adjustable nailer bars with integral nails provided. Nailer bars are extendible from 14" to 24" centers.

ADJUSTMENT:

Hot aiming self locking rack and pinion 45° vertical tilt.
 365° lockable horizontal rotation.

VOLTAGE:

Specify 120V or 277V.

BALLAST:

Solid state electronic.
 Note: Due to ballast / dimmer match some dimmers may cause ballast hum. Check with dimmer manufacturer for suitability.

CEILING CUT OUT:

3 1/2" Ø

LISTINGS:

Dry/damp/wet under covered ceiling.




IC/Airtight housing meets Washington state airflow requirement and ASTM E283. Chicago Plenum housing is Chicago Plenum rated.
 IBEW union made.

NOTES:

- Housing included with trim.
- Maximum ceiling thickness 1 inch. Consult factory for other ceiling conditions.
- Maximum 1 lens option.
- Not for use with ES16 lamps.

PHOTOMETRICS:




LTL No.: 15133.ies
 39W MMHR16 GX10
 25° (tilted 45°)
 Solite lens
 51.9% Efficiency

HOUSING INFORMATION


New Construction

RDB716-NC (20W)
RDB150X-NC (39W)

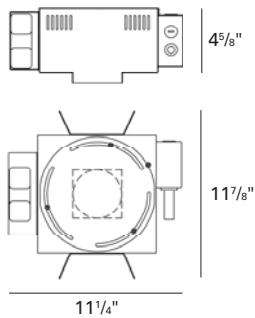


IC/Airtight

RDB716-IC (20W)
 Not available in 39W

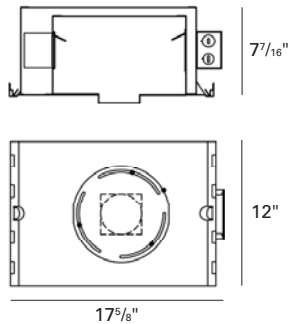

Chicago Plenum

RDB716-CP (20W)
RDB150X-CP (39W)

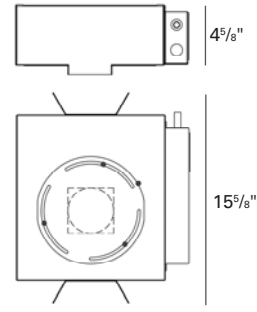

HOW TO SPECIFY

Trim	Finish	Trim Lens*	Housing	Voltage	Accessories
9845		*Solite is standard unless option is specified			
9845 Bevel Trim Adjustable 45°, 20W or 39W MMHR16 GX10	10 - White 21 - Black 28 - Metalized Grey	B - Borosilicate Clear Lens C - Clear Lens F - Frosted Lens L - Linear Spread Lens P - Prismatic Lens S - Solite U - Anti UV Filter	20W MMHR16 RDB716-NC - New Construction RDB716-IC - Insulated Ceiling RDB716-CP - Chicago Plenum 39W MMHR16 RDB150X-NC - New Construction Not available in Insulated Ceiling RDB150X-CP - Chicago Plenum	120V 277V	CB27 - 27" C-Channel Bars CB52 - 52" C-Channel Bars LAMPS - MMHR16 20W/39W