
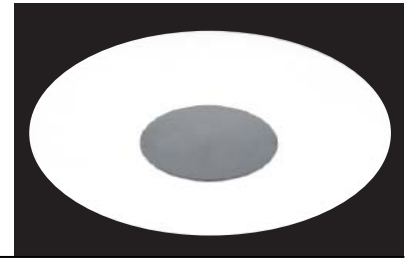


Sliver Low Voltage Halogen

9882

Wet Location Adjustable 45°



LUMINAIRE INFORMATION

APPLICATION:

Accent luminaire for Residential, Commercial, Retail or Hospitality environments.

MATERIALS:

Trim: Die cast aluminum / steel. Torsion spring mounting.
Lens: Frosted.

LAMP: (not included) When using IR lamps, 37W Max.
(1) 75W Max. MR16 GU5.3.

TRANSFORMER:

Magnetic toroidal-HPF. Low voltage solid state electronic optionally available (consult factory).
Note: Due to transformer / dimmer match some dimmers may cause transformer hum. Check with dimmer manufacturer for suitability.

ADJUSTMENT:

360° horizontal and lockable 45° vertical tilt.

VOLTAGE:

Specify 120V or 277V.

CEILING CUT OUT:

4 3/8" Ø

LISTINGS:

Dry/damp/wet under cover ceiling.
Not wet listed in trimless application.




IC/Airtight housing meets Washington state airflow requirement and ASTM E283.
Chicago Plenum housing is Chicago Plenum rated.
IBEW union made.

NOTES:

- Maximum ceiling thickness 1 inch.
Consult factory for other ceiling conditions.
- No lens options available.
- Trimless available for 75W New Construction only.*

PHOTOMETRICS:

Distribution chart



LTL No.: 14452.ies
75W MR16 GU5.3 36°
(tilted 45°)
Frosted lens

HOUSING INFORMATION

New Construction 50TW - (50W)	New Construction 75TW - (75W)	New Construction for Trimless 75TWLR - (75W)*	IC/Airtight 50ICN - (50W)	Chicago Plenum 50TWCP - (50W)	Remote Transformer 50RM - (50W)

HOW TO SPECIFY

Trim	Finish	Housing	Voltage	Accessories
9882				
9882 Sliver Wet Location Adjustable 45°, 75W Max. MR16 GU5.3	10 - White 12 - Brushed Stainless Steel 21 - Black 22 - Textured White 28 - Metalized Grey	50TW - New Construction 75TW - New Construction 75TWLR - New Construction for Trimless 50ICN - IC/Airtight 50TWCP - Chicago Plenum 50RM - Remote Transformer	120V 277V	ER - Emergency Relay