


BEVEL® Trimless Low Voltage Halogen

Adjustable 45°

9945

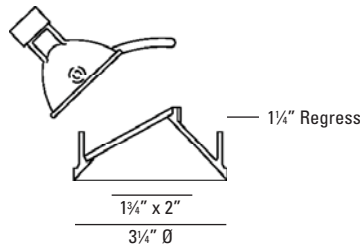

LUMINAIRE INFORMATION

APPLICATION:

Accent luminaire for Residential, Commercial, Retail or Hospitality environments.

MATERIALS:

Trim: Die cast aluminum with ball plunger mounting.
 Housing: Fabricated of 20 ga. galvanized steel with thru wire J-box, 2 in 2 out (4 in 4 out for IC/ Airtight) at min. 90°C, #12 AGW thru branch circuit wiring. Housing and trim supplied as one complete unit.
 Trim Lens: Solite

LAMP: (not included) When using IR lamps, 37W Max.
 New Construction / Chicago Plenum: (1) 71W max. MR16 GU5.3
 IC/Airtight: (1) 50W max. MR16 GU5.3

MOUNTING:

Butterfly brackets and adjustable nailer bars with integral nails provided. Nailer bars are extendible from 14" to 24" centers.

ADJUSTMENT:

Hot aiming self locking rack and pinion 45° vertical tilt.
 365° lockable horizontal rotation.

VOLTAGE:

Specify 120V or 277V.

TRANSFORMER:

Low voltage magnetic toroidal HPF. Low voltage solid state electronic optionally available (consult factory).

Note: Due to transformer / dimmer match some dimmers may cause transformer hum. Check with dimmer manufacturer for suitability.

CEILING CUT OUT:

4 1/4" Ø

LISTINGS:

Dry/damp location.




IC/Airtight housing meets Washington state airflow requirement and ASTM E283. Chicago Plenum housing is Chicago Plenum rated.
 IBEW union made.

NOTES:

- Housing included with trim.
- Maximum ceiling thickness 1 inch. Consult factory for other ceiling conditions.
- Maximum 1 lens option.
- For drywall installation only.
- Not for use with acoustical ceilings.


PHOTOMETRICS:




LTL No.: 15074.ies
 71W MR16 GU5.3 40° (tilted 45°)
 Solite lens
 65.1% Efficiency

HOUSING INFORMATION


New Construction - (71W)
RDL101X-NC

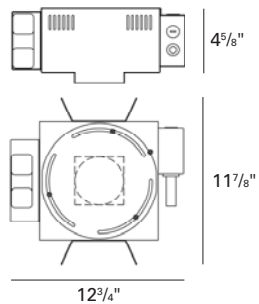

IC/Airtight - (50W)
RDL101X-IC

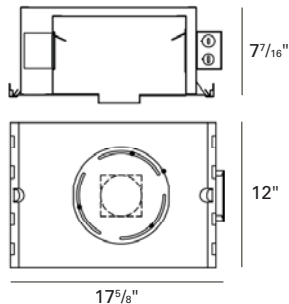

Chicago Plenum - (71W)
RDL101X-CP

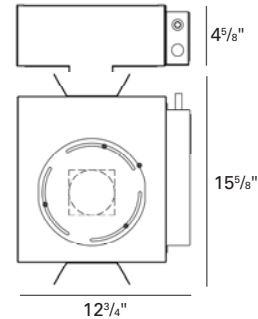

HOW TO SPECIFY

| Trim | Finish | Trim Lens* | Housing | Voltage | Accessories |
|---|--|--|---|----------------------------|---|
| 9945 | | *Solite is standard unless option is specified | | | |
| 9945 Bevel Trimless Adjustable 45°, New Construction and Chicago Plenum: 71W MR16 GU5.3 IC/Airtight: 50W MR16 GU5.3 | 10 - White 21 - Black 28 - Metalized Grey | B - Borosilicate Clear Lens C - Clear Lens F - Frosted Lens L - Linear Spread Lens P - Prismatic Lens S - Solite U - Anti UV Filter | RDL101X-NC - New Construction RDL101X-IC - Insulated Ceiling RDL101X-CP - Chicago Plenum | 120V 277V | CB27 - 27" C-Channel Bars CB52 - 52" C-Channel Bars ER - Emergency Relay |