


Sliver Low Voltage Halogen

9985

Wet Location Adjustable 45°



LUMINAIRE INFORMATION

APPLICATION:

Accent luminaire for Residential, Commercial, Retail or Hospitality environments.

MATERIALS:

Trim: Die cast aluminum / steel. Torsion spring mounting.
Lens: Frosted.

LAMP: (not included) When using IR lamps, 37W Max.
(1) 75W Max. MR16 GU5.3.

TRANSFORMER:

Magnetic toroidal-HPF. Low voltage solid state electronic optionally available (consult factory).
Note: Due to transformer / dimmer match some dimmers may cause transformer hum. Check with dimmer manufacturer for suitability.

ADJUSTMENT:

360° horizontal in 90° increments and lockable 45° vertical tilt.

VOLTAGE:

Specify 120V or 277V.

CEILING CUT OUT:

4 3/8" Ø

LISTINGS:

Dry/damp/wet under cover ceiling.
Not wet listed in trimless application.




IC/Airtight housing meets Washington state airflow requirement and ASTM E283.
Chicago Plenum housing is Chicago Plenum rated.
IBEW union made.

NOTES:

- Maximum ceiling thickness 1 inch. Consult factory for other ceiling conditions.
- No lens options available.
- Trimless available for 75W New Construction only.*

PHOTOMETRICS:

Distribution chart



LTL No.: 14451.ies
50W MR16 GU5.3 40° (tilted 25°), Clear lens
41.2% Efficiency

HOUSING INFORMATION

New Construction
50TW - (50W)


New Construction
75TW - (75W)

New Construction for Trimless
75TWLS - (75W)*

IC/Airtight
50ICN - (50W)

Chicago Plenum
50TWCP - (50W)

Remote Transformer
50RM - (50W)

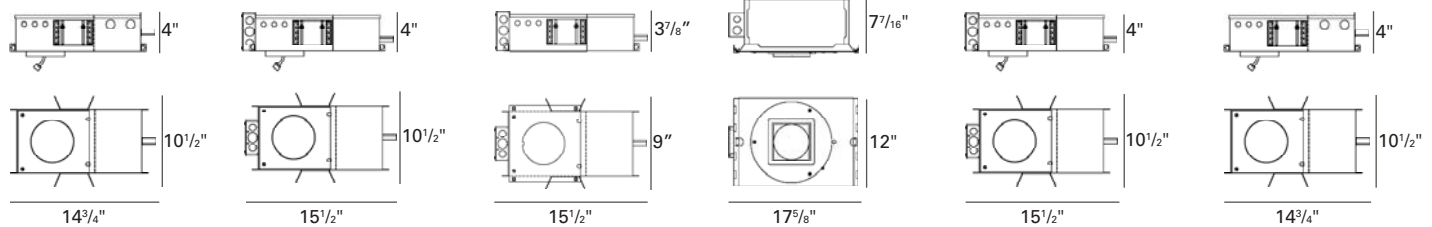

HOW TO SPECIFY

