




NANOLUMEN®

Wall Wash Trim Round

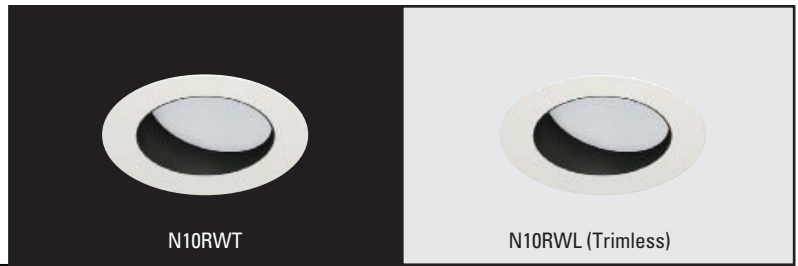

Plan View

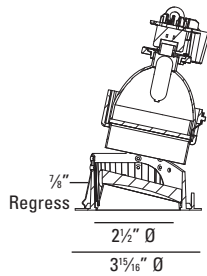

N10RWT

N10RWL (Trimless)

LUMINAIRE INFORMATION

APPLICATION:

Accent luminaire for Residential, Commercial, Retail or Hospitality environments.

MATERIALS:

Trim: Precision die cast body with durable UV-stabilized powder coating.

Reflector: Spun and faceted aluminum.

Trim Lens: Proprietary molded low iron lens.

Baffle Options: High temperature nylon.

BM - Black Matte Baffle

WM - White Matte Baffle

BV - Black Vertical Groove Baffle

WV - White Vertical Groove Baffle

LAMP: (not included)

Captive lamp assembly rotates to provide easy access for relamping, without separating components.

20W T4.5 G8.5

39W T4.5 G8.5

70W T4.5 G8.5

20W T4 GU6.5

39W T4 GU6.5


22W CDM-Tm PGJ5

39W CDM-Tm PGJ5

20W MHMR16 GX10

39W MHMR16 GX10

71W MR16 GU5.3 max.



CEILING CUT OUT:

3 1/2" Ø

LISTINGS:

*Dry/Damp for Trimless and all MR16 and 70W T4.5.

All others are Wet under covered ceiling.




IBEW union made.

NOTES:

- Maximum ceiling thickness up to 1 1/4"
- See housing matrix on back for exceptions.
- Maximum 2 lens options.
- Housing included with trim.
- Not available for use with ES16 lamps.
- Trimless for drywall installation only
- Trimless not available in acoustical ceilings.

WALL WASH TRIM FEATURES

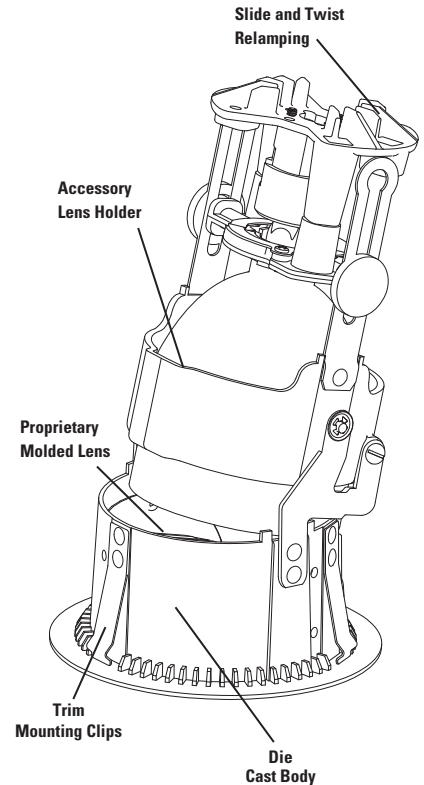

HOW TO SPECIFY

Trim	Baffle Options	Lamp / Wattage	Trim Finish	Optional Trim Lens	Housing	Voltage	Accessories
(Trim) N10RWT	BM - Black Matte Baffle	G852 - 20W T4.5 G853 - 39W T4.5 G857 - 70W T4.5	10 - White 21 - Black 28 - Metalized Grey RAL - Special Color	B - Frosted Borosilicate F - Frosted U - Optivex Anti UV	NC61 NC63 NC71 NC73 IC1 IC3	120V 277V	CB27 - 27" C-Channel CB52 - 52" C-Channel ER - Emergency Relay (MR16) LP - MH Lamps (Consult Factory) ARK1 - 20W/39W Bodine eAK39 ARC Keeper emergency w/ remote test switch • Above ceiling access required • Not for 70W • See Bodine eAK spec sheet for more information
(Trimless) N10RWL	WM - White Matte Baffle BV - Black Vertical Groove Baffle WV - White Vertical Groove Baffle	GU652 - 20W T4 GU653 - 39W T4 PGJ52 - 22W CDM-Tm PGJ53 - 39W CDM-Tm GX102 - 20W MHMR16 GX103 - 39W MHMR16 GU537 - 71W MR16 max.		Above lenses are in additional to standard supplied lens			

HOUSING DETAILS on reverse side

HOUSING FEATURES

- Easy adjustment aperture plate that allows ceiling thickness adjustment from 7/8" to 1 1/4". See housing matrix for details.
- Patent pending "Slide & Replace" easy ballast replacement.
- Quick connectors on all wire connections.
- Universal housing style allows the ability to swap trim styles between Downlight, Adjustable and Wall Wash. See Plug-and-Play limitations on matrix below.
- Fabricated of 20 ga. black powder coated steel with thru wire J-box, 2 in 2 out at min. 90°C, #12 AGW thru branch circuit wiring.

TRANSFORMER: (MR16 Lamps)

Low voltage solid state electronic. Note: Due to transformer / dimmer match some dimmers may cause transformer hum. Check with dimmer manufacturer for suitability.

BALLAST: (MH Lamps)

Solid state electronic.

VOLTAGE:

Specify 120V or 277V.

CEILING CUT OUT:

3 1/2" Ø

LISTINGS:

Dry/Damp for Trimless, Adjustables and all MR16 and 70W T4.5. All others Wet under covered ceiling.



IBEW union made.

NOTES:

- Maximum ceiling thickness 1 1/2". See matrix for ceiling thickness options.
- Housing included with trim.
- Trimless for drywall installation only
- Trimless not available in acoustical ceilings.

HOUSING INFORMATION - See limitations below


New Construction - All lamps except T4.5

NC61 - DL / ADJ / WW

(Max. Ceiling Thickness - 7/8")

NC63 - DL / ADJ 30° / WW

(Max. Ceiling Thickness - 1 1/4")

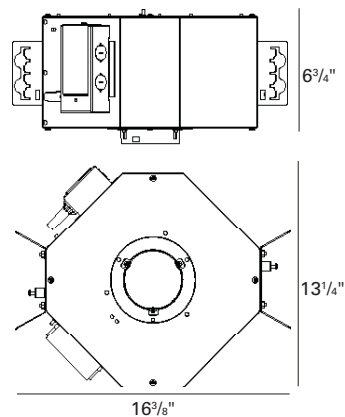


New Construction - T4.5 lamps only

NC71 - DL / ADJ / WW

(Max. Ceiling Thickness - 7/8")

NC73 - DL / ADJ 30° / WW

(Max. Ceiling Thickness - 1 1/4")

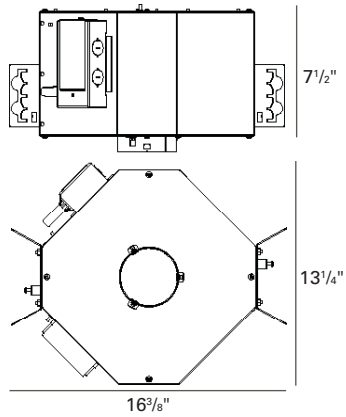


IC / Airtight - 50W max. MR16 only

IC1 - DL / ADJ / WW

(Max. Ceiling Thickness - 7/8")

IC3 - DL / ADJ 30° / WW

(Max. Ceiling Thickness - 1 1/4")

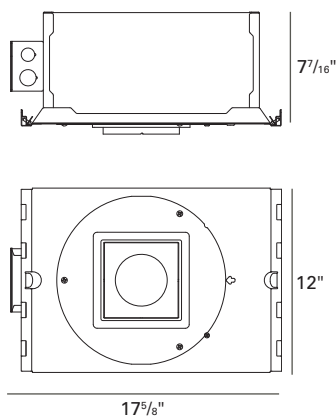

Order housings with trims on reverse side.