


USAI™

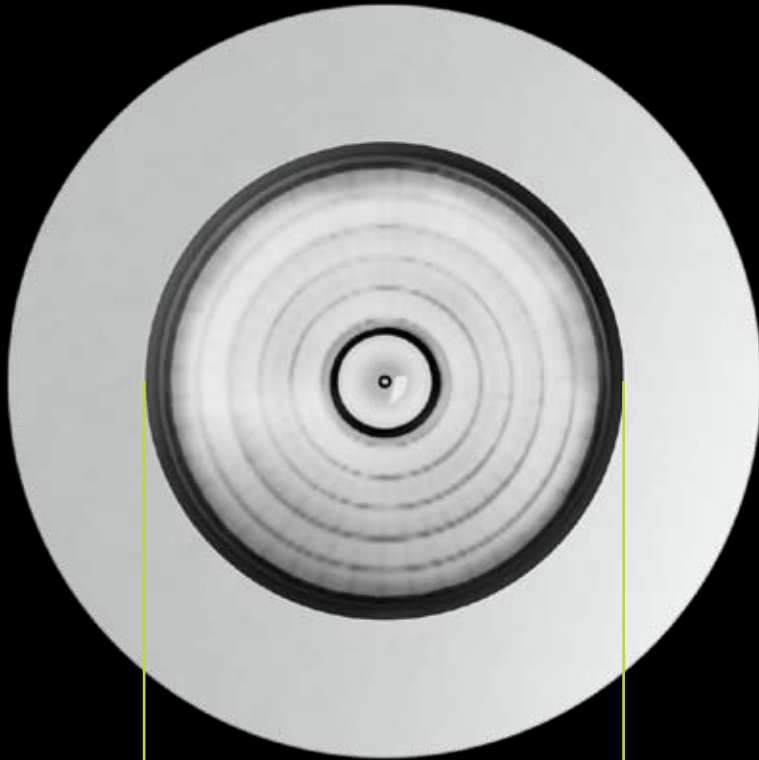

Actual size — 2.5"

NANOLUMEN™

USA Illumination™

Our 2½" aperture blends quietly into the ceiling plane, with a minimal 3⁵/₁₆" outer trim diameter. NanoLumen recessed luminaires are available for metal halide and low-voltage halogen lamps, with the ability to easily change between downlight, adjustable and wallwash functions by using our plug-and-play optical assemblies.



Actual size — 2.5"

NanoLumen Square

Unique square aperture accentuates clean linear design, while delivering exceptional performance.



Downlight

T4 MH 20/39W—GU6.5, PGJ5
MR16 MH 20/39W—GX10
MR16 20-50W—GU5.3



Adjustable

T4 MH 20/39W—GU6.5, PGJ5
MR16 MH 20/39W—GX10
MR16 20-50W—GU5.3



Wallwash

T4 MH 20/39W—GU6.5, PGJ5
MR16 MH 20/39W—GX10
MR16 20-50W—GU5.3



True Hot Aiming

Simple recessed angled screws enable adjustment of vertical aiming and horizontal rotation from below, without trim removal.



Aiming Memory Feature

Unique patent-pending vertical and horizontal aiming memory feature allows users to remove trim for relamping, reflector or accessory change without disturbing the set and locked lamp position.



Easy Relamping

Captive lamp assembly rotates to provide easy access for relamping, without separating components.



Interchangeable Reflectors

Allows for flexibility, while maintaining design consistency: 10-, 20-, 35-, & 60-degree beams available.

USAI™

innovation>>>illumiVation™

USA Illumination™

usaillumination.com

info@usaillumination.com

1126 River Road

New Windsor, NY 12553

T 845-565-8500

F 845-561-1130

This item was printed using FSC approved FLO paper with recycled content.
©2008 USAI. All rights reserved.

NL-080601-001