


Wall Wash

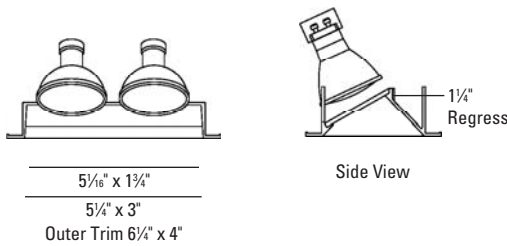

LUMINAIRE INFORMATION

APPLICATION:

Accent luminaire for Residential, Commercial, Retail or Hospitality environments.

MATERIALS:

Trim: Die cast aluminum with torsion spring mounting.
 Housing: All-Ways Square™ housing allows alignment of rectangular aperture (up to 30° rotation) after housing installation and prior to finish ceiling installation. Patent pending. Fabricated of 20 ga. galvanized steel with thru wire J-box, 4 in 4 out at min. 90°C, #12 AGW thru branch circuit wiring.
 Housing and trim supplied as one complete unit.
 Trim Lens: MultiTex proprietary molded low iron lens.

LAMP: (not included)

(2) 20W or 39W MHMR16 GX10.

MOUNTING:

Butterfly brackets and adjustable nailer bars with integral nails provided. Nailer bars are extendible from 14" to 24" centers.

VOLTAGE:

Specify 120V or 277V.

BALLAST:

Solid state electronic.

Note: Due to ballast / dimmer match some dimmers may cause ballast hum. Check with dimmer manufacturer for suitability.

CEILING CUT OUT:

3 1/2" x 5 11/16"

LISTINGS:

Dry/damp/wet under covered ceiling.



IBEW union made.



MultiTex™
 Glass lens with five different surface textures for maximum uniformity.

NOTES:

- Housing included with trim.
- Maximum ceiling thickness 1 inch. Consult factory for other ceiling conditions.
- Maximum 1 lens option.
- Not for use with ES16 lamps.

PHOTOMETRICS:

Distance From Ceiling in Feet	3' on center 3' from wall					
	0.5	1.5	2.5	3.5	4.5	5.5
0.5	8.8	8.6	8.1	8.6	8.9	
1.5	23.5	23.4	22.5	23.4	23.5	
2.5	46.0	46.1	45.5	46.2	46.0	
3.5	62.3	63.0	62.8	63.0	62.3	
4.5	66.0	67.0	66.9	66.9	65.8	
5.5	61.5	62.5	62.5	62.6	61.6	
6.5	53.4	54.3	54.3	54.3	53.5	
7.5	44.0	44.9	44.8	44.7	44.1	


Lamp: (2) 39W MHMR16 GX10, FL40, 2100 Lumens
 Reflectances: 0.8, 0.5, 0.2 LLF: 0.8
 Mounting Height: 8 FT 69.4% Efficiency

HOUSING INFORMATION

New Construction

BL928-A (20W)

BL480-A (39W)

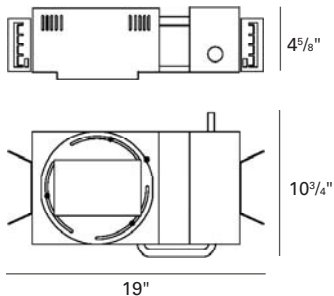

HOW TO SPECIFY

Trim	Finish	Housing	Voltage	Accessories
1666				
1666 Bevel Trim Wall Wash, (2) 20W or 39W MHMR16	10 - White 21 - Black 28 - Metalized Grey	20W MHMR16 BL928-A - New Construction 39W MHMR16 BL480-A - New Construction	120V 277V	CB27 - 27" C-Channel Bars CB52 - 52" C-Channel Bars ACCESSORY HOLDER - Consult Factory LAMPS - MHMR16 20W / 39W