


Medusa² Trimless Low Voltage Halogen Adjustable

6500F-1



LUMINAIRE INFORMATION

APPLICATION:

Accent luminaire for Residential, Commercial, Retail or Hospitality environments.

MATERIALS:

Trim: Steel
 Lamp Assembly: Die cast aluminum
 Housing: Fabricated of 20 ga. galvanized steel with thru wire J-box, 3 in 3 out at min. 90°C, #12 AGW thru branch circuit wiring.
 Housing and trim supplied as one complete unit.
 Lens: Clear

LAMP: (not included) When using IR lamps, 37W Max.
 (1) 50W max. MR16 GU5.3.

MOUNTING:

Butterfly brackets and adjustable nailer bars with integral nails provided. Nailer bars are extendible from 14" to 24" centers.

VOLTAGE:

Specify 120V or 277V.

TRANSFORMER:

Solid state electronic.
 Note: Due to transformer / dimmer match some dimmers may cause transformer hum.
 Check with dimmer manufacturer for suitability.

ADJUSTMENT:

35° X 45° lockable double gimbal rotation

CEILING CUT OUT:

5⁹/₁₆" x 5⁹/₁₆"

LISTINGS:

Dry/damp location.





IBEW union made.

NOTES:

- Housing included with trim.
- Maximum ceiling thickness 1¹/₄". Consult factory for other ceiling conditions.
- Maximum 2 lens option (size B).
- For drywall installation only.
- Not for use with acoustical ceilings.
- Not for use with ES16 lamps.
- Separate switching of lamps available. Two circuits maximum. Consult factory for details.
- Trim Finish "- 40" (white trim finish w/ white interior) utilizes silver braided socket wire sleeves.

HOUSING INFORMATION

New Construction

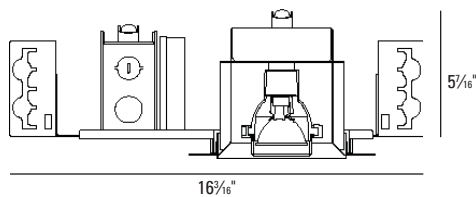

Side View

HOW TO SPECIFY

| Trim | Finish | Voltage | Accessories |
|--|--|--|--|
| 6500F-1 | | | |
| 6500F-1 Medusa ² Trimless Adjustable, 50W MR16 GU5.3 | 10 - Black interior w/ white lamp module 21 - Black interior w/ black lamp module 40 - White interior w/ white lamp module | 120V 277V 120V not compatible with AFCI circuit. | 8177B - Hex Cell Louver 9143B - Frosted Lens 9153B - Anti UV Filter 9155B - Linear Spread Lens 9156B - Prismatic Spread Lens 9157B - Solite Lens 9199B - Frosted Borosilicate Lens CB27 - 27" C-Channel Bars CB52 - 52" C-Channel Bars ER - Emergency Relay |