


# Medusa<sup>2</sup>® Trimless Low Voltage Adjustable

# 6500F-2

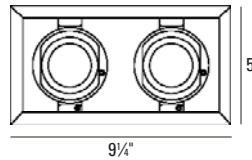

## LUMINAIRE INFORMATION

### APPLICATION:

Accent luminaire for Residential, Commercial, Retail or Hospitality environments.

### MATERIALS:

Trim: Steel  
 Lamp Assembly: Die cast aluminum  
 Housing: Fabricated of 20 ga. galvanized steel with thru wire J-box, 3 in 3 out at min. 90°C, #12 AGW thru branch circuit wiring.  
 Housing and trim supplied as one complete unit.  
 Lens: Clear

**LAMP:** (not included) When using IR lamps, 37W Max.  
 (2) 50W max. MR16 GU5.3.

### MOUNTING:

Butterfly brackets and adjustable nailer bars with integral nails provided. Nailer bars are extendible from 14" to 24" centers.

### VOLTAGE:

Specify 120V or 277V.

### TRANSFORMER:

Solid state electronic.  
 Note: Due to transformer / dimmer match some dimmers may cause transformer hum.  
 Check with dimmer manufacturer for suitability.

### ADJUSTMENT:

35° X 45° lockable double gimbal rotation

### CEILING CUT OUT:

5 9/16" x 9 13/16"

### LISTINGS:

Dry/damp location.




IBEW union made.

### NOTES:

- Housing included with trim.
- Maximum ceiling thickness 1 1/4". Consult factory for other ceiling conditions.
- Maximum 2 lens option (size B).
- For drywall installation only.
- Not for use with acoustical ceilings.
- Separate switching of lamps available. Two circuits maximum. Consult factory for details.
- 120V not compatible with AFCI circuit.
- Trim Finish "- 40" (white trim finish w/ white interior) utilizes silver braided socket wire sleeves.

## HOUSING INFORMATION

New Construction

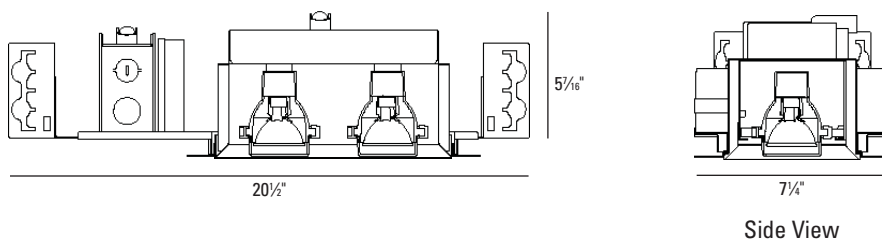

## HOW TO SPECIFY

Trim	Finish	Voltage	Accessories
6500F-2			
6500F-2 Medusa <sup>2</sup> Trimless Adjustable, 50W MR16 GU5.3	10 - Black interior w/ white lamp module 21 - Black interior w/ black lamp module 40 - White interior w/ white lamp module	120V 277V  120V not compatible with AFCI circuit.	8177B - Hex Cell Louver 9143B - Frosted Lens 9153B - Anti UV Filter 9155B - Linear Spread Lens 9156B - Prismatic Spread Lens 9157B - Solite Lens 9199B - Frosted Borosilicate Lens CB27 - 27" C-Channel Bars CB52 - 52" C-Channel Bars ER - Emergency Relay