
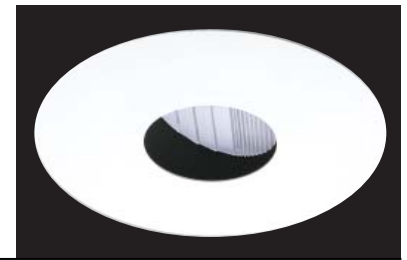


HX-Sliver Metal Halide

3998 3999

Wall Wash

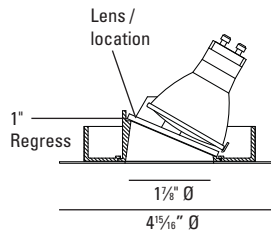

LUMINAIRE INFORMATION

APPLICATION:

Accent luminaire for Residential, Commercial, Retail or Hospitality environments.

MATERIALS:

Trim: Die cast aluminum / steel with torsion spring mounting.

3998 - Vertical groove black baffle

3999 - White cone

Lens: MultiTex proprietary molded low iron lens

LAMP: (not included)

Must use 25° lamp for optimum wall wash performance.

(1) 20W or 39W MHMR16 GX10.

VOLTAGE:

Specify 120V or 277V.

BALLAST:

Solid state electronic.

CEILING CUT OUT:

4 3/8" Ø

LISTINGS:

Dry/damp location.



IC/Airtight housing meets Washington state airflow requirement and ASTM E283.

Chicago Plenum housing is Chicago Plenum rated.

IBEW union made.

NOTES:

- Maximum ceiling thickness 1 inch. Consult factory for other ceiling conditions.
- Not for use with ES16 lamps.

PHOTOMETRICS:

Distance From Ceiling in Feet	3' on center 3' from wall					
	0.5	1.5	2.5	3.5	4.5	5.5
0.5	4.8	4.7	4.4	4.7	4.9	4.9
1.5	11.7	11.6	11.0	11.6	11.6	11.6
2.5	25.7	25.7	24.6	25.7	25.7	25.7
3.5	39.6	40.0	39.1	39.9	39.6	39.6
4.5	42.0	42.6	42.4	42.6	42.0	42.0
5.5	36.3	36.9	37.0	37.0	36.4	36.4
6.5	29.7	30.3	30.3	30.3	29.8	29.8
7.5	23.7	24.3	24.3	24.2	23.7	23.7

Lamp: 39W MHMR16 GX10 40°, 2100 Lumens
 Reflectances: 0.8, 0.5, 0.2
 LLF: 0.8 Mounting Height: 8 FT
 69.1% Efficiency



MultiTex™


Glass lens with five different surface textures for maximum uniformity.

HOUSING INFORMATION

New Construction

HX824 - (20W)


HX439 - (39W)

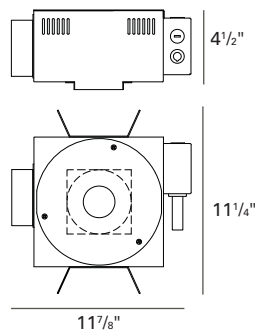

IC/Airtight

HX824-IC - (20W)


Not available in 39W

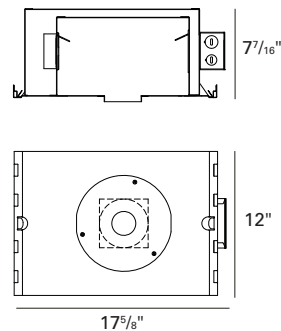

Chicago Plenum

HX824-CP - (20W)

HX400SL-CP - (39W)

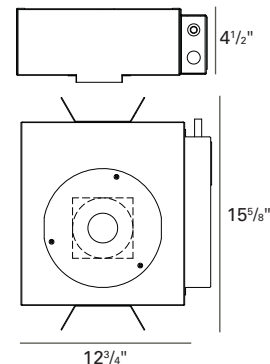

ORDERING INFORMATION

Trim

3998 - Vertical Groove Black Baffle

3999 - White Cone

HX-Sliver

Wall Wash,

New Construction and

Chicago Plenum:

20W or 39W MHMR16

IC/Airtight: 20W MHMR16

– Finish

10 - White

12 - Brushed

Stainless Steel

21 - Black

22 - Texture White

28 - Metalized Grey

– Housing

20W MHMR16

HX824 - New Construction

HX824-IC - IC/Airtight

HX824-CP - Chicago Plenum

39W MHMR16

HX400SL - New Construction

Not available in IC/Airtight

HX400SL-CP - Chicago Plenum

– Voltage

120V

277V

– Accessories

CB27 - 27" C-Channel Bars

CB52 - 52" C-Channel Bars

LAMPS - MHMR16 20W / 39W

How to Specify

Trim – Finish – Housing – Voltage – Accessories

USA I®

USA Illumination™
 www.usaillumination.com
 info@usaillumination.com

1126 River Road
 New Windsor, NY 12553

T 845-565-8500
 F 845-561-1130

©2009, USAI, LLC.
 All rights reserved.
 All designs protected by copyright.
 Rev. 3/29/10