


# Medusa<sup>2</sup>® Low Voltage Halogen

# 6500T-4

## Adjustable

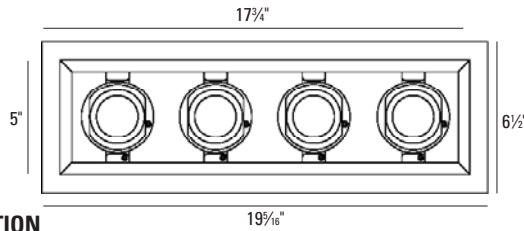

### LUMINAIRE INFORMATION

#### APPLICATION:

Accent luminaire for Residential, Commercial, Retail or Hospitality environments.

#### MATERIALS:

Trim: Steel  
 Lamp Assembly: Die cast aluminum  
 Housing: Fabricated of 20 ga. galvanized steel with thru wire J-box, 3 in 3 out at min. 90°C, #12 AGW thru branch circuit wiring.  
 Housing and trim supplied as one complete unit.  
 Lens: Clear

**LAMP:** (not included) When using IR lamps, 37W Max.  
 (4) 50W max. MR16 GU5.3.

#### MOUNTING:

Butterfly brackets and adjustable nailer bars with integral nails provided. Nailer bars are extendible from 14" to 24" centers.

#### VOLTAGE:

Specify 120V or 277V.

#### TRANSFORMER:

Solid state electronic.  
 Note: Due to transformer / dimmer match some dimmers may cause transformer hum.  
 Check with dimmer manufacturer for suitability.

#### ADJUSTMENT:

35° X 45° lockable double gimbal rotation

#### CEILING CUT OUT:

5 9/16" x 18 5/16"

#### LISTINGS:

Dry/damp location.




IBEW union made.

#### NOTES:

- Housing included with trim.
- Maximum ceiling thickness 1 1/4". Consult factory for other ceiling conditions.
- Maximum 2 lens option (size B).
- Separate switching of lamps available. Two circuits maximum. Consult factory for details.
- 120V not compatible with AFCI circuit.
- Trim Finish " - 40" (white trim finish w/ white interior) utilizes silver braided socket wire sleeves.

### HOUSING INFORMATION

New Construction

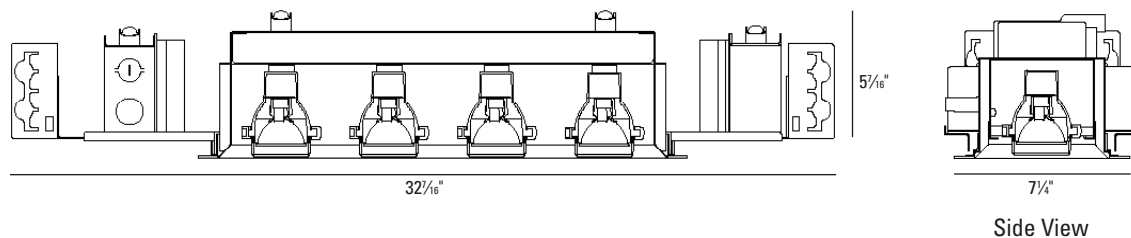

### HOW TO SPECIFY

Trim	Finish	Voltage	Accessories
6500T-4			
<b>6500T-4</b> Medusa <sup>2</sup> Trim Adjustable, 50W MR16 GU5.3	10 - White trim w/ black interior / lamp module 21 - Black trim w/ black interior / lamp module 28 - Metalized Grey trim w/ black interior / lamp module 40 - White trim w/ white interior / lamp module	120V 277V  120V not compatible with AFCI circuit.	8177B - Hex Cell Louver 9143B - Frosted Lens 9153B - Anti UV Filter 9155B - Linear Spread Lens 9156B - Prismatic Spread Lens 9157B - Solite Lens 9199B - Frosted Borosilicate Lens CB27 - 27" C-Channel Bars CB52 - 52" C-Channel Bars ER - Emergency Relay