


HX-Sliver Metal Halide

9298 9299

Wall Wash

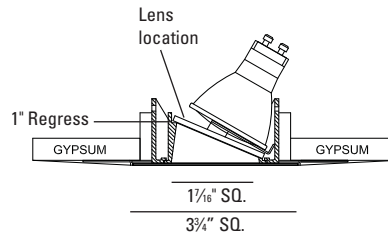

LUMINAIRE INFORMATION

APPLICATION:

Accent luminaire for Residential, Commercial, Retail or Hospitality environments.

MATERIALS:

Trim: Die cast aluminum / steel with torsion spring mounting.
 9298 - Vertical groove black baffle
 9299 - White cone
 Lens: MultiTex proprietary molded low iron lens

LAMP: (not included)

Must use 25° lamp for optimum wall wash performance.
 (1) 20W or 39W MHMR16 GX10.

VOLTAGE:

Specify 120V or 277V.

BALLAST:

Solid state electronic.

CEILING CUT OUT:

3³/₈" Ø

LISTINGS:

Dry/damp location.



IC/Airtight housing meets Washington state airflow requirement and ASTM E283.
 Chicago Plenum housing is Chicago Plenum rated.
 IBEW union made.

NOTES:

- Maximum ceiling thickness 1 inch. Consult factory for other ceiling conditions.
- For drywall installation only.
- Not for use with acoustical ceilings.



MultiTex™

Glass lens with five different surface textures for maximum uniformity.

PHOTOMETRICS:

Distance From Ceiling in Feet	3' on center 3' from wall					
	0.5	1.5	2.5	3.5	4.5	5.5
0.5	4.7	4.6	4.4	4.6	4.8	
1.5	11.5	11.4	10.9	11.4	11.5	
2.5	25.4	25.4	24.4	25.5	25.4	
3.5	39.3	39.7	38.9	39.7	39.4	
4.5	41.8	42.4	42.2	42.4	41.7	
5.5	36.1	36.7	36.8	36.8	36.2	
6.5	29.6	30.1	30.2	30.2	29.6	
7.5	23.6	24.2	24.2	24.1	23.7	


Lamp: 39W MHMR16 GX10 40°, 2100 Lumens
 Reflectances: 0.8, 0.5, 0.2
 LLF: 0.8 Mounting Height: 8 FT
 69.1% Efficiency

HOUSING INFORMATION

New Construction

HXFLS420 - (20W)


HXFLS439 - (39W)

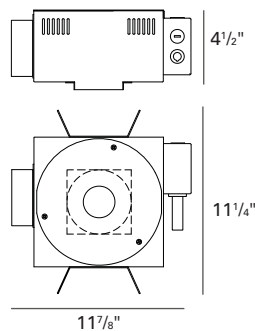

IC/Airtight

HXFLS420-IC - (20W)


Not available in 39W

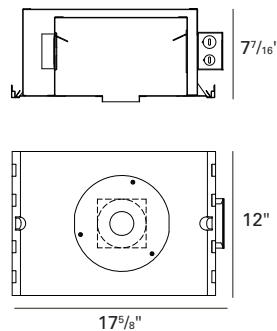

Chicago Plenum

HXFLS420-CP - (20W)

HXFLS439-CP - (39W)

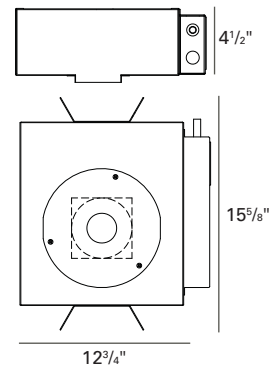

ORDERING INFORMATION

Trim

9298 - Vertical Groove Black Baffle

9299 - White Cone

HX-Sliver Trimless

Wall Wash,

New Construction and

Chicago Plenum:

20W or 39W MHMR16

IC/Airtight: 20W MHMR16

Finish

10 - White

12 - Brushed

Stainless Steel

21 - Black

22 - Texture White

28 - Metalized Grey

Housing

20W MHMR16

HXFLS420 - New Construction

HXFLS420-IC - IC/Airtight

HXFLS420-CP - Chicago Plenum

39W MHMR16

HXFLS439 - New Construction

Not available in IC/Airtight

HXFLS439-CP - Chicago Plenum

Voltage

120V

277V

Accessories

CB27 - 27" C-Channel Bars

CB52 - 52" C-Channel Bars

LAMPS - MHMR16 20W / 39W

How to Specify

Trim - Finish - Housing - Voltage - Accessories



USA Illumination™
 www.usaillumination.com
 info@usaillumination.com

1126 River Road
 New Windsor, NY 12553

T 845-565-8500
 F 845-561-1130

©2009, USAI, LLC.
 All rights reserved.
 All designs protected by copyright.
 Rev. 3/29/10